



Wallbarn - Technical Datasheet

PVC Collar - H60mm



Product Description

The collars in PVC are designed to connect prefabricated synthetic PVC roofing felts with possible through pipes. They are fitted with a smooth flange to improve welding to the prefabricated PVC roofing felts. A slightly conical shape enables installation in through pipes.

Compatibility

They are compatible with prefabricated PVC felts/membranes.

Performance

Resistant to deterioration by the sun, ozone and normal atmospheric conditions. They have excellent flexibility even at low temperatures and will not become brittle. The mechanical properties are maintained in the long term.

Operating Temperatures

-20°C; +75°C

Recycled Product

No

Material


PVC

Recyclable

Yes



Wallbarn - Technical Datasheet

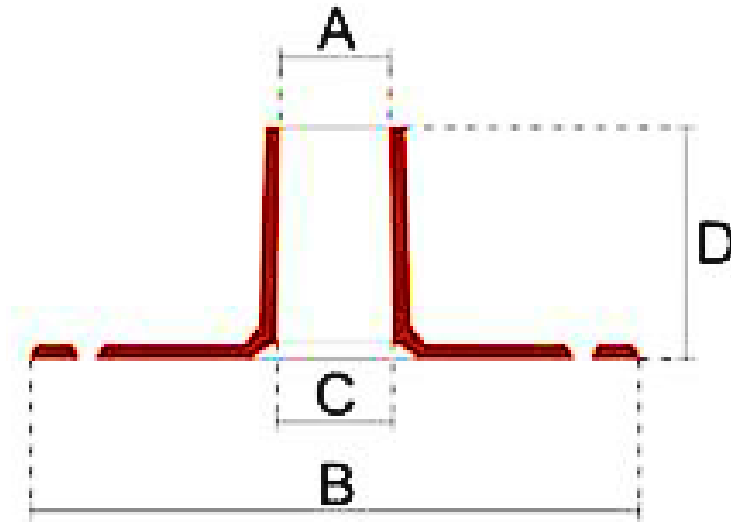

Product Code	Description	A	B	C	D
RO-PVC-120-370-060-010-Z	PVC Collar H60mm - D10mm	10	154	11	60
RO-PVC-120-370-060-030-Z	PVC Collar H60mm - D30mm	30	154	32	60
RO-PVC-120-370-060-040-Z	PVC Collar H60mm - D40mm	40	154	42	60
RO-PVC-120-370-060-060-Z	PVC Collar H60mm - D60mm	60	194	62	60
RO-PVC-120-370-060-080-Z	PVC Collar H60mm - D80mm	80	194	82	60

Wallbarn Ltd
 Unit 16 Capital Business Centre
 22 Carlton Road, South Croydon. CR2 0BS

IMS.T.1081.v2

Phone : 0208 916 2222 Email : sales@wallbarn.com Website : www.wallbarn.com