



Wallbarn - Technical Datasheet

TPE Circular Roof Outlet (Ribbed Flange)



Product Description

TPE circular downpipe outlets designed to be bonded to bituminous waterproofing membranes around roof drainage downpipes. The flange is ribbed to help grip to the membrane and improve the bond.

The slightly conical shape of the spigot enables fast and simple installation into drainpipes. It has two rings on the spigot which act as a drain-trap between the connector and the rain water drain. Always prime the outlet and membrane before installation.

Compatibility

They are compatible with APP and SBS prefabricated bituminous felts and bituminous coats.

Performance

Resistant to deterioration by the sun, ozone and normal atmospheric conditions. They have excellent flexibility even at low temperatures and will not become brittle. The mechanical properties are maintained in the long term.

Operating Temperatures

-20°C; +70°C

Recycled Product

No

Material

TPE

Recyclable

Yes


Wallbarn Ltd
Unit 16 Capital Business Centre
22 Carlton Road, South Croydon. CR2 0BS

IMS.T.1066.v2

Phone : 0208 916 2222 Email : sales@wallbarn.com Website : www.wallbarn.com



Wallbarn - Technical Datasheet

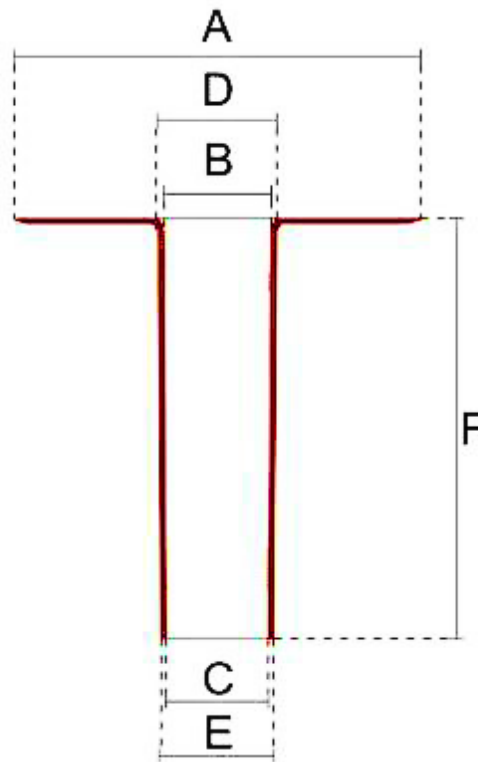

Product Code	Description	A	B	C	D	E	F
RO-TPE-030-040-240-040-Z	TPE Circular Roof Outlet (ribbed flange) H240mm - D40mm	235	26	24	33	29	243
RO-TPE-030-040-240-090-Z	TPE Circular Roof Outlet (ribbed flange) H240mm - D90mm	320	77	73	82	78	243
RO-TPE-030-040-240-125-Z	TPE Circular Roof Outlet (ribbed flange) H240mm - D125mm	320	114	109	119	114	243

Wallbarn Ltd
 Unit 16 Capital Business Centre
 22 Carlton Road, South Croydon. CR2 0BS

IMS.T.1066.v2

Phone : 0208 916 2222 Email : sales@wallbarn.com Website : www.wallbarn.com