




## Wallbarn - Technical Datasheet

### TPE Collar (Perforated Flange)

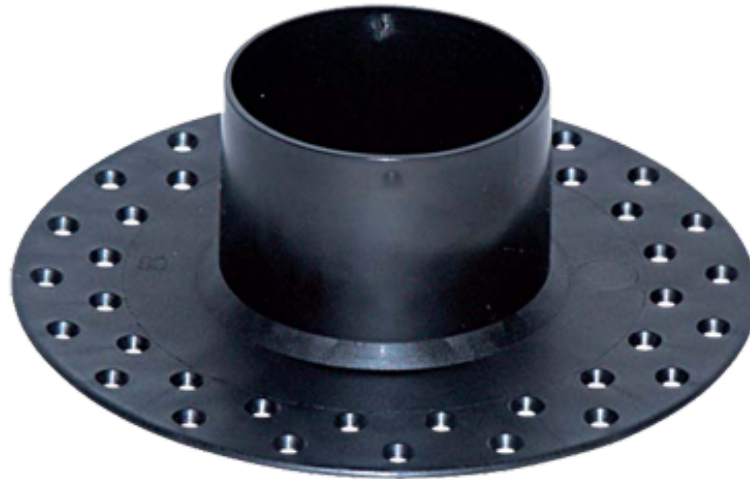

#### Product Description

The collars in TPE are designed to connect bituminous membranes with emerging pipework such as stink pipes and vents. They are fitted with a perforated flange to improve adhesion to bituminous felts and liquid membranes. A slightly tapered shape aids installation in through pipes.

#### Compatibility

They are compatible with APP and SBS prefabricated bituminous felts and liquid bitumen membranes.

#### Performance

Resistant to deterioration by the sun, ozone and normal atmospheric conditions. They have excellent flexibility even at low temperatures and will not become brittle. The mechanical properties are maintained in the long term.

#### Operating Temperatures

-20°C; +70°C

#### Recycled Product

No

#### Material

TPE

#### Recyclable

Yes


Wallbarn Ltd  
Unit 16 Capital Business Centre  
22 Carlton Road, South Croydon. CR2 0BS

IMS.T.1072.v2

Phone : 0208 916 2222 Email : [sales@wallbarn.com](mailto:sales@wallbarn.com) Website : [www.wallbarn.com](http://www.wallbarn.com)



## Wallbarn - Technical Datasheet

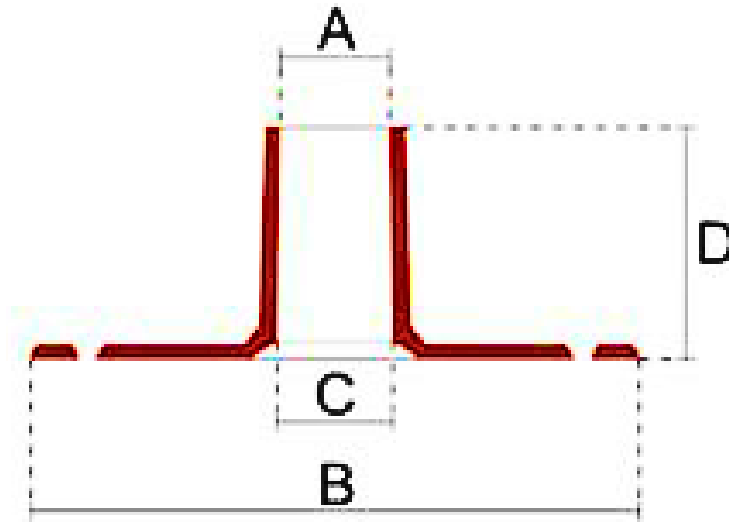

Product Code	Description	A	B	C	D
RO-TPE-030-380-060-030-Z	TPE Collar (perforated flange) - H60mm - D30mm	30	154	32	60
RO-TPE-030-380-060-040-Z	TPE Collar (perforated flange) - H60mm - D40mm	40	154	42	60
RO-TPE-030-380-060-060-Z	TPE Collar (perforated flange) - H60mm - D60mm	60	194	62	60
RO-TPE-030-380-060-080-Z	TPE Collar (perforated flange) - H60mm - D80mm	80	194	82	60

Wallbarn Ltd  
 Unit 16 Capital Business Centre  
 22 Carlton Road, South Croydon. CR2 0BS

IMS.T.1072.v2

Phone : 0208 916 2222 Email : [sales@wallbarn.com](mailto:sales@wallbarn.com) Website : [www.wallbarn.com](http://www.wallbarn.com)