



Wallbarn - Technical Datasheet

TPE Collar - H90mm (Perforated Flange)



Product Description

This TPE Collar is designed to connect bituminous membranes with possible through pipes. They are fitted with a smooth flange to improve adhesion to the prefabricated bituminous membranes. A slightly conical shape enables installation in through pipes. Installation in through pipes.

Compatibility

They are compatible with APP and SBS prefabricated bituminous felts and bituminous coats.

Performance

Resistant to deterioration by the sun, ozone and normal atmospheric conditions. They have excellent flexibility even at low temperatures and will not become brittle. The mechanical properties are maintained in the long term.

Operating Temperatures

-20°C; +75°C

Recycled Product

No

Material


TPE

Recyclable

Yes



Wallbarn - Technical Datasheet

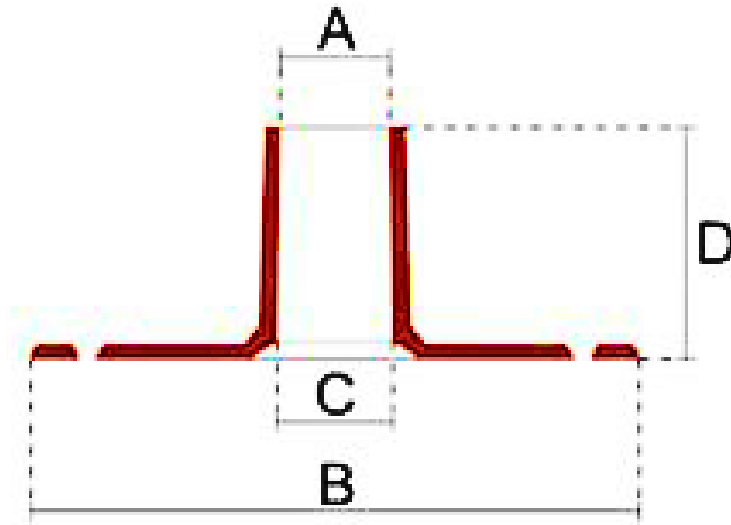

Product Code	Description	A	B	C	D
RO-TPE-030-380-090-100-Z	TPE Collar (perforated flange) - H90mm - D100mm	100	234	102	90
RO-TPE-030-380-090-120-Z	TPE Collar (perforated flange) - H90mm - D120mm	120	234	122	90
RO-TPE-030-380-090-140-Z	TPE Collar (perforated flange) - H90mm - D140mm	140	274	142	90
RO-TPE-030-380-090-160-Z	TPE Collar (perforated flange) - H90mm - D160mm	160	274	162	90

Wallbarn Ltd
 Unit 16 Capital Business Centre
 22 Carlton Road, South Croydon. CR2 0BS

IMS.T.1083.v2

Phone : 0208 916 2222 Email : sales@wallbarn.com Website : www.wallbarn.com