



Wallbarn - Technical Datasheet

TPE 45° Corner Outlet



Product Description

TPE through wall or corner fittings made are used to connect bituminous waterproof roofing felt to rain water drains placed close to walls through bends for form a long term seal. They have a perforated flange with holes to help with heat bonding or sandwiching between layers of waterproofing membrane. The sides of the flange are angled to create a fillet to improve drainage.

They are available in two versions either with a 65x100 mm rectangular section or with a 100x100 mm square section. Always prime outlet and membrane before installation.

Compatibility

They are compatible with APP and SBS prefabricated bituminous felts and bituminous coats.

Performance

Resistant to deterioration by the sun, ozone and normal atmospheric conditions. They have excellent flexibility even at low temperatures and will not become brittle. The mechanical properties are maintained in the long term.

Operating Temperatures

-20°C; +70°C

Recycled Product

No

Material

TPE

Recyclable


Yes

Wallbarn Ltd
Unit 16 Capital Business Centre
22 Carlton Road, South Croydon. CR2 0BS

IMS.T.1061.v2



Wallbarn - Technical Datasheet

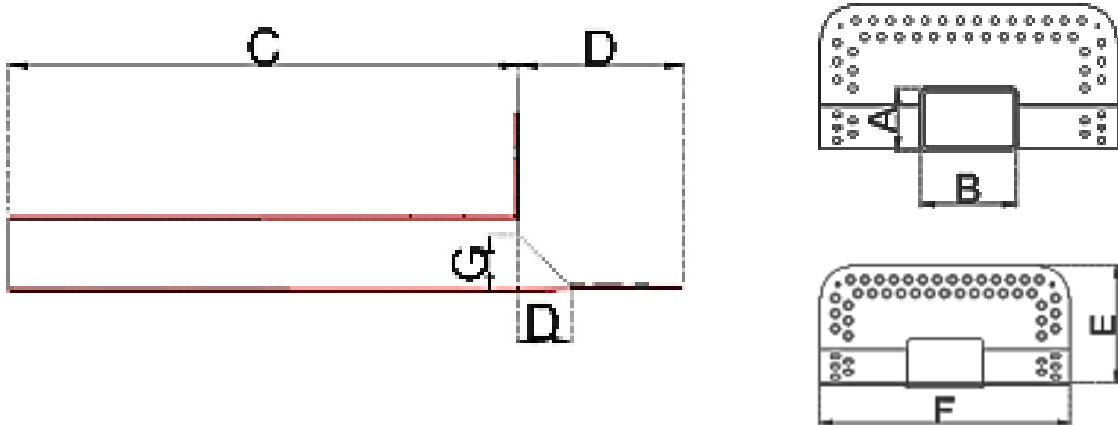

Product Code	Description	A	B	C	D	E	F	G	H
RO-TPE-030-321-065-100-Z	TPE Corner Outlet 45 degree perforated flange 65mmx100mm	65	100	427	140	150	310	44	46
RO-TPE-030-321-100-100-Z	TPE Corner Outlet 45 degree perforated flange 100mmx100mm	100	100	427	140	150	310	44	46