

Wallbarn - Technical Datasheet TPE 90° Corner Outlet - Rectangle Shank



Product Description

The corner fittings have been designed to overcome the problem connecting the waterproof roofing felts with rain water drains placed close to walls. They have a flange with holes to improve gas welding of the bituminous roofing felt.

They are available in two versions either with a 65x100 mm rectangular section or with a 100x100 mm square section. The flange is slightly inclined to the shank to aid a slanted installation of the connector. The corner fitting can be installed in both horizontal and vertical drains.

Compatibility

They are compatible with APP and SBS prefabricated bituminous felts and bituminous coats.

Performance

Resistant to deterioration by the sun, ozone and normal atmospheric conditions. They have excellent flexibility even at low temperatures and will not become brittle. The mechanical properties are maintained in the long term.

Operating Temperatures	Recycled Product
-20°C; +70°C	No
Material	Recyclable
TPE	Yes


Wallbarn Ltd Unit 16 Capital Business Centre 22 Carlton Road, South Croydon. CR2 0BS


IMS.T.1060.v2

Phone : 0208 916 2222 Email : sales@wallbarn.com Website : <u>www.wallbarn.com</u>



Wallbarn - Technical Datasheet

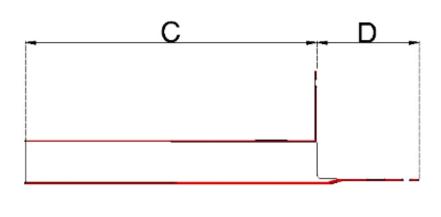



F

Product Code	Description	A	В	С	D	Е	F
RO-TPE-030-320- 065-100-Z	TPE Corner Outlet 90 degree perforated flange 65mmx100mm	65	100	427	150	162	340
RO-TPE-030-320- 100-100-Z	TPE Corner Outlet 90 degree perforated flange 100mmx100mm	100	100	427	150	162	340

Wallbarn Ltd Unit 16 Capital Business Centre 22 Carlton Road, South Croydon. CR2 0BS

IMS.T.1060.v2

Phone : 0208 916 2222 Email : sales@wallbarn.com Website : <u>www.wallbarn.com</u>