



## Wallbarn - Technical Datasheet

### ExaDeck Porcelain Decking

**BOARD DIMENSIONS : 26mm (H) x 141mm (D) x 1,217mm (L)**

DESCRIPTION	TEST	STANDARD	RESULTS
Length & Width Thickness Straightness of sides Rectangularity Surface Flatness	ISO 10545-2 ISO 10545-2 ISO 10545-2 ISO 10545-2 ISO 10545-2w	±1,0% ±2,0mm ± 10% ± 0,5% ± 1,0% ± 0,5%	±0,6% ±2 mm ±5% ±1,2 mm ±0,5% ±2 mm ± 0,5% ± 0,5%
Fire Resistance	A1-A2	Class A1-A2	Class A1fl
Water absorption	ISO 10545-3	≤ 0,5 %	≤ 0,5 %
Breaking strength	ISO 10545-4	≥ 3000 N	≥ 15.000 N
Resistance to thermal shock	ISO 10545-9	Required	Guaranteed
Crazing Resistance	ISO 10545-11	Required	Guaranteed
Frost Resistance	ISO 10545-12	Required	Guaranteed
Chemical Resistance	ISO 10545-13	Minimum B	A/LA/HA
Stain Resistance	ISO 10545-14	Minimum Class 3	Class 5
Anti-slip Resistance (barefoot)	DIN 51097	-	C Group
Anti-slip Resistance (ramp)	DIN51130	-	R11

**Wallbarn Ltd**  
**Unit 16 Capital Business Centre**  
**22 Carlton Road, South Croydon. CR2 0BS**

**IMS.T.1003.v2**

**Phone : 0208 916 2222 Email : [sales@wallbarn.com](mailto:sales@wallbarn.com) Website : [www.wallbarn.com](http://www.wallbarn.com)**



## Wallbarn - Technical Datasheet ExaDeck Porcelain Decking

DESCRIPTION	TEST	STANDARD	RESULTS
Slip Resistance (pendulum)	UNE-41901 EX	Required (C.T.E)	Anti-slip Class 3
Minimal value of static load	EN 12825	-	Class 2
Maximum value of deflection for ultimate load 6KN	EN 12825	-	Class A
Weight	8.52Kgs per Board	49Kgs per sqm	-


### Colours



**Natural**



**Antico**

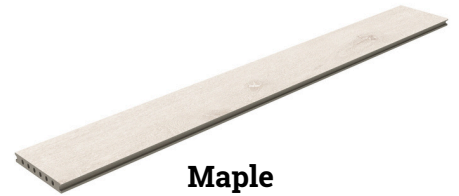

**Maple**



**Grey**



**Oak**



**Teca**