



## Wallbarn - Technical Datasheet

### TPE Circular Roof Outlet (Perforated Flange)



#### Product Description

TPE circular downpipe outlets designed to be bonded to bituminous waterproofing membranes around roof drainage downpipes. They have a perforated flange to improve the watertight bond. The outlet is bonded in the sandwich method where it is bonded between two layers of waterproofing membrane for an over-and-under seal.

The slightly conical shape of the spigot enables fast and simple installation into drainpipes. It has two rings on the spigot to prevent water travelling upwards from the drainpipe. Always prime the outlet and membrane before installation.

#### Compatibility

They are compatible with APP and SBS prefabricated bituminous felts and bituminous coats.

#### Performance

Resistant to deterioration by the sun, ozone and normal atmospheric conditions. They have excellent flexibility even at low temperatures and will not become brittle. The mechanical properties are maintained in the long term.

#### Operating Temperatures

-20°C; +70°C

#### Recycled Product

No

#### Material

TPE

#### Recyclable


Yes

Wallbarn Ltd  
Unit 16 Capital Business Centre  
22 Carlton Road, South Croydon. CR2 0BS

IMS.T.1067.v2



## Wallbarn - Technical Datasheet

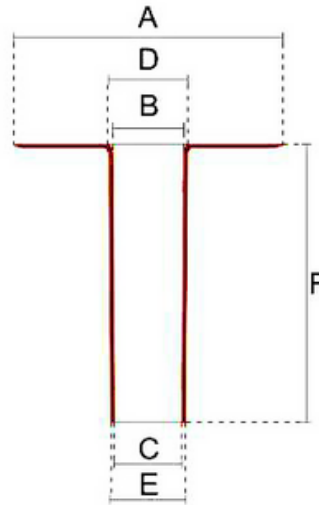

Product Code	Description	A	B	C	D	E	F
RO-TPE-030-050-240-040-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D40mm	235	26	24	33	29	243
RO-TPE-030-050-240-060-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D60mm	235	48	43	53	48	243
RO-TPE-030-050-240-075-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D75mm	320	65	61	70	66	243
RO-TPE-030-050-240-080-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D80mm	320	69	64	74	69	243
RO-TPE-030-050-240-090-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D90mm	320	77	73	82	78	243
RO-TPE-030-050-240-100-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D100mm	320	89	84	94	89	243

Wallbarn Ltd


IMS.T.1067.v2

Unit 16 Capital Business Centre  
22 Carlton Road, South Croydon. CR2 0BS

Phone : 0208 916 2222 Email : [sales@wallbarn.com](mailto:sales@wallbarn.com) Website : [www.wallbarn.com](http://www.wallbarn.com)



## Wallbarn - Technical Datasheet

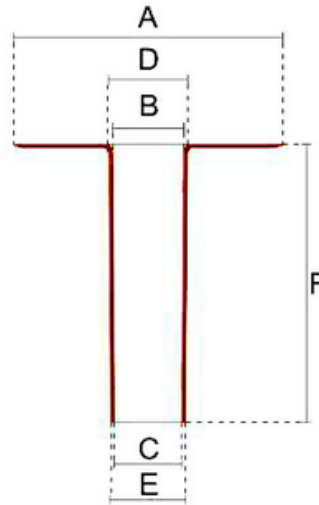

Product Code	Description	A	B	C	D	E	F
RO-TPE-030-050-240-110-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D110mm	320	91	87	97	92	243
RO-TPE-030-050-240-125-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D125mm	320	114	109	119	114	243
RO-TPE-030-050-240-140-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D140mm	380	127	122	132	127	243
RO-TPE-030-050-240-150-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D150mm	380	136	131	141	136	243
RO-TPE-030-050-240-160-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D160mm	380	146	141	151	146	243
RO-TPE-030-050-240-200-Z	TPE Circular Roof Outlet (perforated flange) H240mm - D200mm	440	185	180	190	185	243

Wallbarn Ltd

IMS.T.1067.v2

Unit 16 Capital Business Centre  
22 Carlton Road, South Croydon. CR2 0BS

Phone : 0208 916 2222 Email : [sales@wallbarn.com](mailto:sales@wallbarn.com) Website : [www.wallbarn.com](http://www.wallbarn.com)